

Construction

Finish 1000C	High temp paint
Finish 2000C	Porcelain enamel
Door	Fully removable - 4mm steel
Door Glass	5 mm thick neo-ceramic
Firebox	Continuously welded 6mm cold rolled steel
Baffle	5 x 25mm thick ceramic fire bricks
Internal Liners	11 x 25mm thick ceramic fire bricks


Performance

Heating Type	Radiant
Average efficiency	72%
Emission level	3.3g/kg
Peak Heat Output	15KW / 51,000BTU
Max Rec Heating Capacity	21 squares/210 sqm
Overnight burn time on low	10 hours

Dimensions

Height x Width x Depth	665mm x 640mm x 517mm
Minimum Hearth Size (Depth x Width)	1050mm x 1050mm
Minimum Hearth Thickness	12mm Non combustible material
Weight	
Flue Spigott Diameter	

Clearances

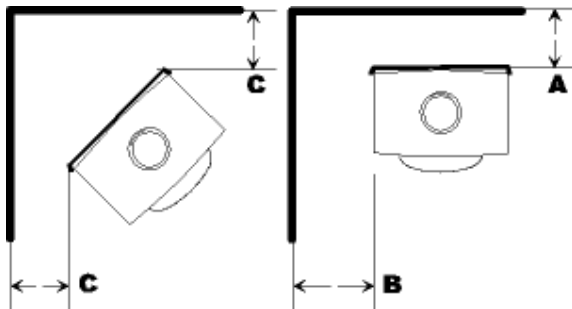

	Without flue shield	With reflector shield	With perforated flue shield and inner reflector shield
A	350 mm	100 mm	150 mm
B	300 mm	300 mm	300 mm
C	200 mm	200 mm	200 mm
door clearance front	400 mm	400 mm	400 mm
door clearance side	200 mm	200 mm	200 mm